



Electric Motor Coil Co.

TOLL FREE: 1-855-COM@COIL
(1-855-266-2645)
Fax: 705.733.5652
Email: lucas@emccltd.com





STATOR DATA



CLEAR FORM

Customer _____	JOB# _____
P.O.BOX/ST.NO. _____	
CITY _____ Province _____	
CONTACT _____	MFG _____ H.P./K.W. _____
PHONE# _____ Fax _____	R.P.M. _____ FRAME _____
P.O.NUMBER _____	VOLTS _____ AMPS _____
DATE ORDERED _____	MODEL _____ TYPE _____
S.T. _____ RUSH _____ O.T. _____	PHASE _____ HZ _____ TEMP. RISE _____
SHIP VIA _____	S/N _____ SVC.Factor _____

- Core bore (Diam) _____
 - Core Length _____
 - Finger Width _____
 - Top straight length _____
 - Bottom straight length _____
 - Front extension _____
 - Rear extension _____
 - Total coil length _____
 - Front ring extension _____
 - Front ring drop _____
 - Rear ring extension _____
 - Rear ring drop _____
 - Tooth width _____
 - Below slot iron _____
 - Knuckle lift _____
 - 15a. Small drop _____
 - 15b. Large drop _____
- Throw direction Right or Left
 - Lead location 16. ☐ 17. ☐ or 18. ☐
 - Coil span: 1& _____
 - Jumper conn. 1-4 ☐ or 1-7 ☐
 - Number of circuits and connection. _____ Wye/Delta (circle one)
 - Grouping _____
 - Coil pin diameter(s) _____
 - Bare wire width _____
 - Bare wire thickness _____
 - Wires in hand _____
 - Arrangement _____ X _____
 - No. turns _____
 - Strand insul. (type & build) _____
 - No. Slots _____
 - Coil weight (pounds) _____
- Wedge depth _____
 - Depth under wedge _____
 - Total slot depth _____
 - Slot width _____

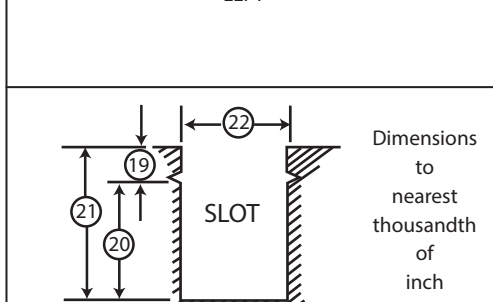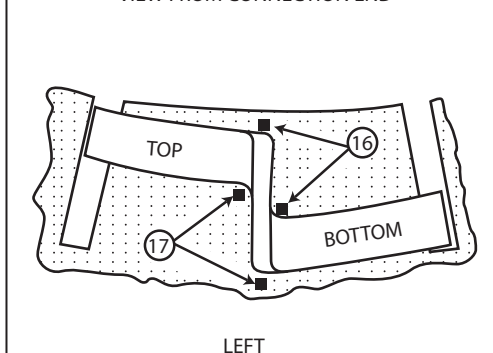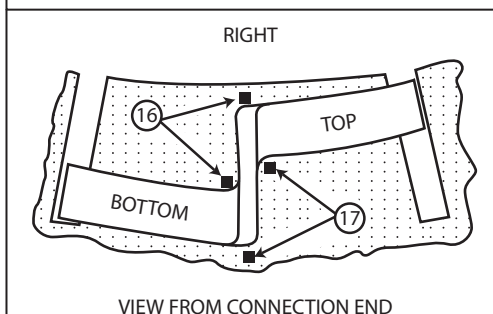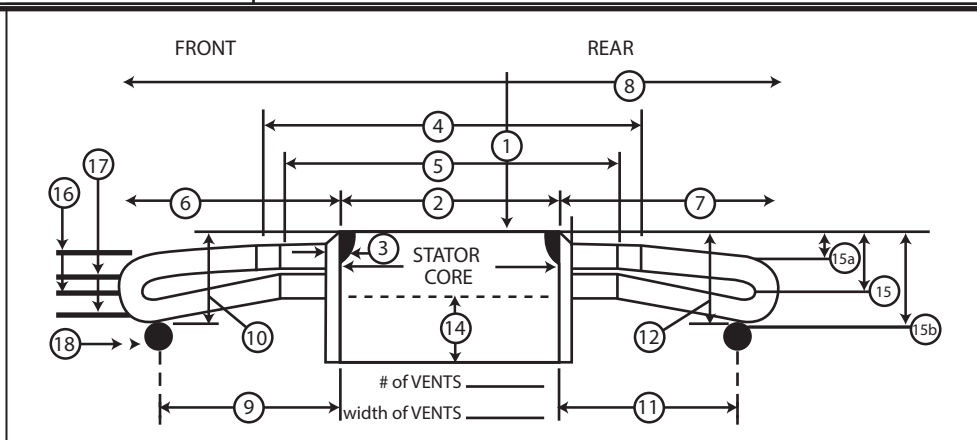

SKEWED SLOT YES ☐ NO ☐

SKEW DISTANCE

RIGHT ☐

LEFT ☐

SPECIAL FEATURES YES NO

(please mark all boxes)

Tin Leads ☐ ☐

1/4 Twist inner lead ☐ ☐

Terrace wound ☐ ☐

Taped Leads ☐ ☐

Corona shield ☐ ☐

Knuckle Lift critical ☐ ☐

End bell clearance is tight. ☐ ☐

RTD's ☐ ☐

Slot liner in use. Size ☐ ☐

COMMENTS: _____

INSULATION CLASS

- F (DIP/BAKE) - HERMETIC
- VPI - SEALED

